



Features

- CAN 2.0A and 2.0B
- 2-Channels
- Micro-controller
- Up to 1 Mbit/sec
- ISO 11898 transceivers

Computer Interface

- PCI slot, Rev 2.2
- Fast dual-port RAM
- 3.3 or 5 V

Agency Approvals

- CE, UL/CSA, FCC
- RoHS 2002/95/EC

CAN Monitor Software

- View CAN messages
- CAN bus loading
- Diagnostics
- Download firmware

Plug-and-play

- CML & CMO
- Xenus
- Accelnet
- Stepnet


A highly cost-effective dual-channel CAN card makes the connection between Copley's distributed control software and CANopen servo and stepper drives. The two independent CAN ports are galvanically isolated to provide greater noise immunity in industrial environments. An on-board microcontroller off-loads tasks from the host computer enabling faster system performance.

PCI compliant, it is compatible with both 3.3 Vdc and 5 Vdc computers.


The card employs high-speed ISO 11898 transceiver circuits for CAN bus bit-rates up to 1 Mbit/sec. Driver software for Windows XP and 2000 is a free download from the Copley web-site. CMO (Copley Motion Objects) software, also available free on the web, works with Microsoft COM enabled computers for control of Copley's CANopen servo amplifiers and stepper drivers from high-level languages such as Visual Basic and LabView.

CONNECTOR

SUB-D 9M



MECHANICAL OUTLINE

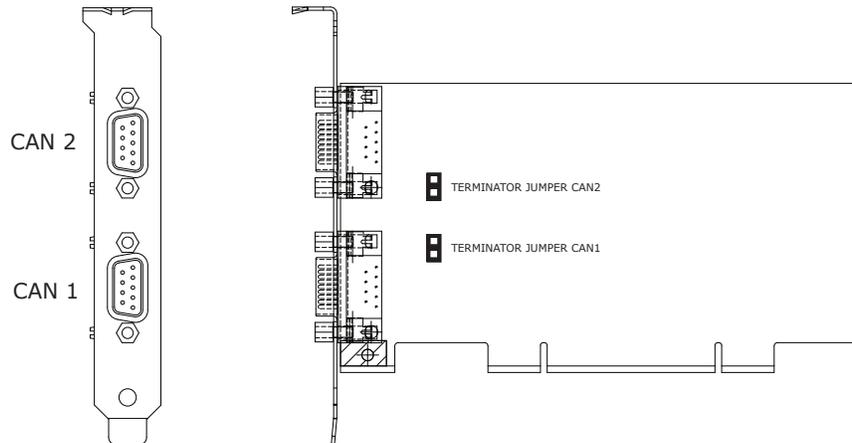

SIGNALS & PINS

PIN	SIGNAL
1	N.C.
2	CAN_L
3	CAN_GND
4	N.C.
5	(CAN_SHLD)
6	(GND)
7	CAN_H
8	N.C.
9	(CAN_V+)

SPECIFICATIONS

Hardware requirements	IBM PC or equivalent with PCI slot
PCI Interface	32-bit, 3.3 & 5 V compatible, version 2.2
OS requirements	Windows XP, 2000 or Linux
CAN channels	2, independent, galvanically isolated
CAN termination	121Ω each channel, jumper selectable
CAN transceivers	Philips TJA1050TD (ISO 11898 compliant)
CAN bit rate	1 Mbit/sec maximum
CAN connector	Sub-D 9M, CAN DS-102 compliant
Timestamp resolution	1 μs
Operating temperature	-10° to +70° C
Storage temperature	-40° to +85 C
Dimensions	5.6 x 3.15 [142 x 80] in [mm]

ORDERING GUIDE

PART NUMBER	DESCRIPTION
CAN-PCI-02	Dual-channel CAN interface card for PCI 2.2 sockets

Driver software for Windows XT or 2000, firmware, CAN-monitor, and CME 2 can be downloaded from the Copley web-site. Contact the factory for drivers for Linux