

Protection Circuit Module

PCM / BMS / PCB


For 51.2V 16S LiFePO4 Battery Packs

Data Sheet

Item	Contents		Criteria (Adjustable)
1	Model	HCX-D131	16S- 60A working current
2	Voltage	Charging voltage	57.6V
3	Current	Maximal continuous charging current	60A
		Maximal continuous discharging current	60A
		Current consumption	≤20μA
4	Overcharge Protection	Over charge detection voltage	3.90V±0.025V
		Over charge detection delay time	0.5~2S
		Over charge release voltage	3.80V±0.05V
5	Over Discharge Protection	Over discharge detection voltage	2.00V±0.05V
		Over discharge detection delay time	50~200mS
		Over discharge release voltage	2.30V±0.1V
6	Over Current Protection	Over current detection voltage	0.1V~0.2V
		Over current detection current	180±20A
		Detection delay time	5~20mS
		Release condition	Cut load,automatically recover
7	Short Circuit Protection	Detection condition	Exterior shot circuit
		Detection delay time	200~500uS
		Release condition	Cut load,automatically recover
8	Balance	Balance voltage for single cell	3.6V±0.025V
		Balance current for single cell	144±20 mA
9	Resistance	Inner resistance	≤20mΩ
10	Temperature	Operating temperature range	-40~+85°C
		Storage temperature range	-20~+125°C
11	Size (L*W*T)	L120mm*W80mm*T15mm	

Remarks:

Charge,Discharge at same Port
 P+=B+/Charge+/Discharge+
 P-=Charge-/Discharge-

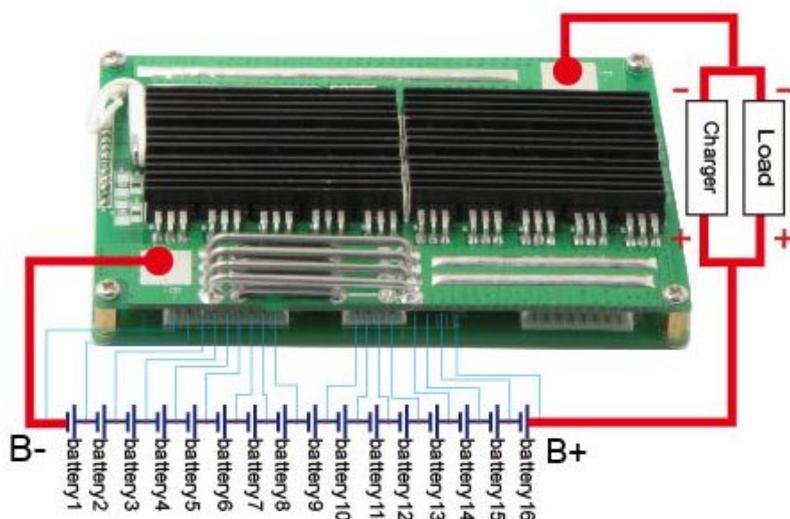

*Note:Characteristics subject to change without notice.